



Vacuum Machine



YS-ZS-400(420)

Vacuum Machine

Pump capacity	20m ³ /h
Machine cycle	15-40sec.
Heating base	400mm x 2bars (420mm x 1bar)
Dimensions	500 x 530 x 490 mm
Voltage	220V 50HZ (other voltages optional)
Power	1.0KW
Weight	68(65)KG
Chamber dimensions	




YS-ZS-500S

Vacuum Machine

Pump capacity	20m ³ /h
Machine cycle	20-50sec.
Heating base	500mmX2bars
Dimensions	585 x 630 x 490 mm
Voltage	220V 50HZ (other voltages optional)
Power	1.0KW
Chamber dimensions	



Wearing parts:
Heater winding
High-temperature adhesive tape
Seal packingring



YS-DQ-500S

Vacuum Machine

Pump capacity	20m ³ /h
Machine cycle	25-50sec.
Heating base	500mmX2bar
Dimensions	585 x 630 x 900 mm
Voltage	220V 50HZ (other voltages optional)
Power	1.0KW
Chamber dimensions	






YS-DQ-400(420)

Vacuum Machine

Pump capacity	20m ³ /h
Machine cycle	15-40sec.
Heating base	400mm x 2bars (420mm x 1bar)
Dimensions	500 x 530 x 1000 mm
Voltage	220V 50HZ (other voltages optional)
Power	1.0KW
Weight	88(85)KG
Chamber dimensions	


Pump capacity	20m ³ /h
Machine cycle	25-50sec.
Heating base	500mmX1bar
Dimensions	585 x 630 x 900 mm
Voltage	220V 50HZ (other voltage optional)
Power	1.0KW
Chamber dimensions	



YS-SQ-550

Vacuum Machine


Pump capacity	40m ³ /h
Machine cycle	25-40sec.
Heating base	550mm x 2bars
Dimensions	1310 x 800 x 1150 mm
Voltage	380V 50HZ 3P (other voltages optional)
Power	2.0KW
Chamber dimensions	



YS-SQ-600

Vacuum Machine


Pump capacity	63m ³ /h
Machine cycle	25-50sec.
Heating base	600mm x 2bars
Dimensions	1310 x 830 x 1150 mm
Voltage	380V 50HZ 3P (other voltages optional)
Power	2.2KW
Chamber dimensions	



YS-DZ-PT

Vacuum Machine

Pump capacity	20m ³ /h
Machine cycle	15-30sec.
Heating base	420mm x 1bars
Dimensions	495 x 535 x 800 mm
Voltage	220V 50HZ (other voltages optional)
Power	1.0KW
Chamber dimensions	



YS-SDZK-400

Vacuum Machine


Outside dimensions	L 690 x W4600 x H1.44
Product dimensions	L < 360 x W < 265x H < 100
Maximum coil width	350
Maximum coil diameter	220
Production	
Maximum speed (u/h)	240
(it depends on the product and the used film)	
Installed power (KVA)	10
Electric Outlet	380V AC3+N
Pneumatic pressure(cm ²)	6-10
Pneumatic flow (l/min)	200



YS-LXZK-480

Full-Automatic Continuous Thermoforming Machine

Outside dimensions	L 3.335 x W870 x H1.723
Product dimensions	L250 x W0x H100
Maximum coil width	420
Maximum coil diameter	320
Production	
Maximum speed (u/h)	350
(it depends on the product and the used film)	
Installed power (KVA)	11
Electric Outlet	380V AC3+N
Pneumatic pressure(cm ²)	7
Pneumatic flow (l/min)	800

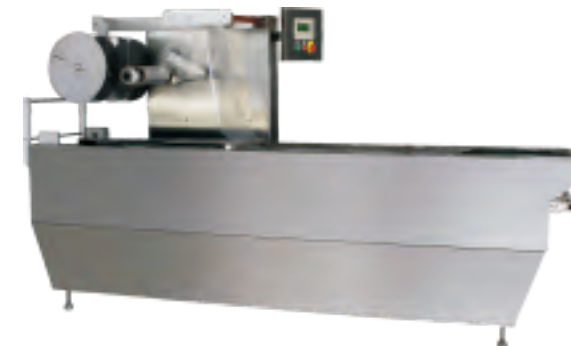

YS-ZDZK-320

Full-Automatic Continuous Vacuum Machine

Width of upper film	280mm
Width of lower film	320mm
Vacuum	≤200Pa
Compressed air	≥0.6MPa
Cooling water	≥0.15MPa
Power	380V/50HZ
Capacity	15KW
Dimension	4800x680x1700mm
Weight	1600kg

